


Features and Benefits

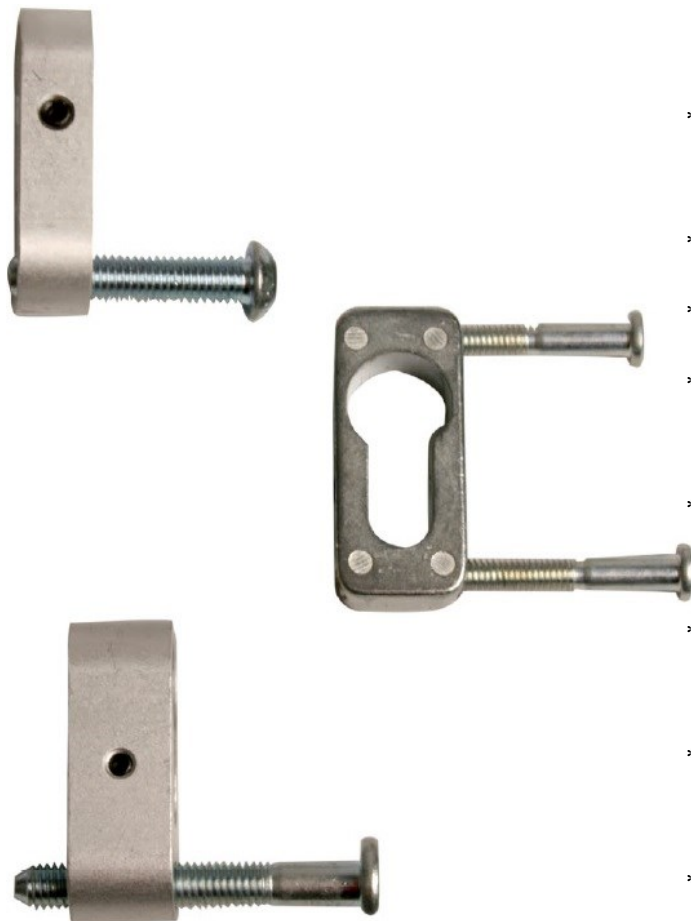

- * Prevents external removal of the door cylinder.
- * Alternative design options.
- * Fits most Euro profile cylinders.
- * Designed for composite, timber and PVCu doors.
- * Tested to meet the requirements of PAS 023/024
- * Designed to be retro-fitted to existing doors.
- * Enhance the security for the cylinder and lock.
- * High performance guaranteed.
- * 10 year

Technical Information

Material Specification

Composite Door

Cylinder Guard: Extruded Aluminium 12mm deep

Bolts: 8mm diameter high tensile steel bolts 41mm long.

Grub Screws: Black carbon steel 2mm

PVCu Door

Cylinder guard: Extruded Aluminium 18mm deep.

Zinc alloy casting BSen 12844 13mm deep.

Bolts: 8mm diameter high tensile steel bolts 59 mm long.

Inward opening composite & PVCu Doors

6mm diameter high tensile steel bolts 50mm long x 2.

Grub Screw: Black carbon steel 2mm

Setting Block: Zinc alloy casting.

Additional Information

Corrosion Resistance: Meets the requirement of BS EN 1670 Grade 4 240 Hrs NS

Operation: Security tested to meet the requirements of PAS 023/024



Window & Door Accessories Ltd.

Richmond House, Newtown Avenue, Malahide Road Industrial Park, Dublin 17

Tel: 01-8670011 Fax: 01-8670011 Email: info@wdacc.ie Web: www.wdacc.ie